

WXF

( 71~355

[www.wolong.com](http://www.wolong.com)

**WOLONG**  
*Power your future*

# Contents

## 01

卧龙集团简介 \_\_\_\_\_ 03

## 02

WXF 产品概述 \_\_\_\_\_ 04

## 03

电气性能参数 \_\_\_\_\_ 06

WXF5  
WXF4  
WXF3  
WXF2

## 04

电机外形与安装型式 \_\_\_\_\_ 22

B3  
PAD

## 05

电动机选配件 \_\_\_\_\_ 30

## 06

电机订购指南 \_\_\_\_\_ 31



# W XF

W XF

IEC60034-30-1 IE2-IE5

IEC

GB 18613-2020 1

W XF

S2


S1 S2

400

2h

W XF5

160 M1-2 F200



200 2h  
160mm 160  
M 1 2

W XF5 IE5  
W XF4 IE4  
W XF3 IE3  
W XF2 IE2

-20 ~+40  
1000m



GB755

90%

F200	200	2h
F300	300	2h
F400	400	2h



	H71-H355	-
	0.18-315kW	-
	GB 18613 1 2 3	-
	IEC 60034-30-1 IE5 IE4 IE3 IE2	-
	2P 4P 6P 8P	-
	380V	220/380V 230/400V 380/660V 400/690V
	50Hz	60Hz
	S1 S2 2h	+200 /2h +300 /2h +400 /2h
	B3 80-355 PAD 71-280	-
	F B	H ,
	3kW 380V "Y" 3kW 380V " "	-
	IP55	-
	IC418	-
	160 180	-
	200 -400	

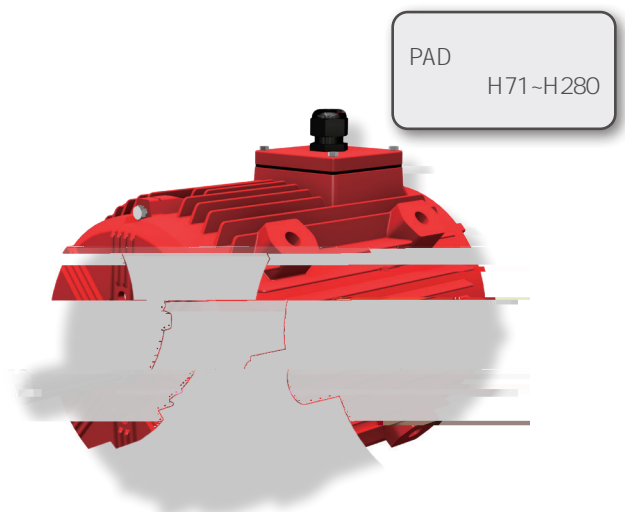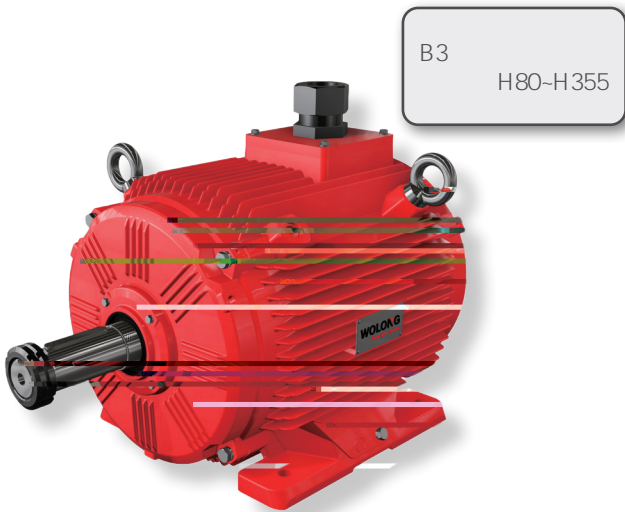

# WXF5

200 ~400 2h 50Hz 2P IE5





200 ~400 2h 50Hz 6P IE5

	kW	A			r/min	%									kg	L <sub>PA</sub> dB(A)	L <sub>WA</sub> dB(A)	kg m <sup>2</sup>	N.m
		I <sub>N</sub> 380V	I <sub>N</sub> 400V	I <sub>N</sub> 415V		50%	75%	100%	50%	75%	100%								
WXF5-80M1-6	0.37	1.01	0.96	0.93	930	76.9	81.6	<b>81.6</b>	0.49	0.61	<b>0.68</b>	1.9	10	2	18	46	54	0.0074	3.82
WXF5-80M2-6	0.55	1.42	1.35	1.3	930	82.5	84.2	<b>84.2</b>	0.51	0.63	<b>0.7</b>	1.9	9	2.1	22	46	54	0.013	5.68
WXF5-90S-6	0.75	1.9	1.8	1.74	940	83.2	85.7	<b>85.7</b>	0.51	0.63	<b>0.7</b>	2.1	8.5	2.1	33	49	57	0.016	7.62
WXF5-90L-6	1.1	2.74	2.6	2.51	945	84.7	87.2	<b>87.2</b>	0.52	0.64	<b>0.7</b>	2.1	7.8	2.1	42	49	57	0.033	11.1
WXF5-100L-6	1.5	3.63	3.45	3.32	950	85.4	88.4	<b>88.4</b>	0.56	0.66	<b>0.71</b>	2.1	8	2.1	48	53	61	0.045	14.9
WXF5-112M-6	2.2	5.25	4.99	4.81	950	86.3	89.7	<b>89.7</b>	0.56	0.66	<b>0.71</b>	2.1	8	2.1	65	57	65	0.441	22.1
WXF5-132S-6	3	7.09	6.73	6.49	960	87.6	90.6	<b>90.6</b>	0.57	0.66	<b>0.71</b>	2	7.5	2.1	76	61	69	0.71	29.8
WXF5-132M1-6	4	9.24	8.77	8.46	960	88.4	91.4	<b>91.4</b>	0.59	0.67	<b>0.72</b>	2	8	2.1	85	61	69	0.8	39.8
WXF5-132M2-6	5.5	12.6	12	11.5	965	89.1	92.2	<b>92.2</b>	0.59	0.67	<b>0.72</b>	2	8	2.1	95	61	69	0.85	54.4
WXF5-160M-6	7.5	16.1	15.3	14.8	970	89.8	92.9	<b>92.9</b>	0.61	0.72	<b>0.76</b>	2.1	8	2.1	150	65	73	1.27	73.8
WXF5-160L-6	11	23.2	22	21.2	970	90.8	93.7	<b>93.7</b>	0.62	0.73	<b>0.77</b>	2.1	8.5	2.1	185	65	73	1.39	108
WXF5-180L-6	15	30.2	28.7	27.7	975	92	94.3	<b>94.3</b>	0.68	0.76	<b>0.8</b>	2	8.5	2.1	235	65	73	1.7	147
WXF5-200L1-6	18.5	37.1	35.3	34	980	92.4	94.6	<b>94.6</b>	0.68	0.76	<b>0.8</b>	2.1	8.5	2.1	210	65	73	1.93	180
WXF5-200L2-6	22	43.5	41.3	39.8	980	92.6	94.9	<b>94.9</b>	0.7	0.77	<b>0.81</b>	2.1	8.5	2.1	240	65	73	2.55	214
WXF5-225M-6	30	58.3	55.4	53.4	980	92.9	95.3	<b>95.3</b>	0.71	0.81	<b>0.82</b>	2	8.3	2.1	375	66	74	2.81	292
WXF5-250M-6	37	70.8	67.3	64.9	985	93.7	95.6	<b>95.6</b>	0.71	0.81	<b>0.83</b>	2.1	8.3	2.1	460	64	76	3.63	361
WXF5-280S-6	45	86	81.7	78.7	985	93.7	95.8	<b>95.8</b>	0.72	0.81	<b>0.83</b>	2.1	8.5	2	605	66	78	4.17	439
WXF5-280M-6	55	104	98.4	94.9	985	93.8	96	<b>96</b>	0.73	0.81	<b>0.84</b>	2	8.5	2	660	66	78	4.8	536
WXF5-315S-6	75	141	134	129	990	95.2	96.3	<b>96.3</b>	0.74	0.81	<b>0.84</b>	2	8	2	1320	70	83	5.07	727
WXF5-315M-6	90	167	158	153	990	95.4	96.5	<b>96.5</b>	0.74	0.81	<b>0.85</b>	2	8	2	1450	70	83	5.59	873
WXF5-315L1-6	110	204	193	186	990	95.6	96.6	<b>96.6</b>	0.74	0.81	<b>0.85</b>	2	8	2	1480	70	83	6.25	1066
WXF5-315L2-6	132	241	229	221	990	95.7	96.8	<b>96.8</b>	0.74	0.83	<b>0.86</b>	2	8	2	1580	70	83	7.69	1280
WXF5-355M1-6	160	292	277	267	995	96.2	96.9	<b>96.9</b>	0.76	0.84	<b>0.86</b>	1.9	8	2	2100	72	85	8.28	1551
WXF5-355M2-6	185	337	320	309	995	96.2	97	<b>97</b>	0.76	0.84	<b>0.86</b>	1.9	8	2	2150	72	85	8.58	1793
WXF5-355M3-6	200	364	346	334	995	96.2	97	<b>97</b>	0.76	0.84	<b>0.86</b>	1.9	8	2	2150	72	85	8.66	1939
WXF5-355L1-6	220	396	376	363	995	96.2	97	<b>97</b>	0.82	0.85	<b>0.87</b>	1.9	8	2	2200	72	85	8.78	2112
WXF5-355L2-6	250	455	433	417	995	96.2	97	<b>97</b>	0.82	0.85	<b>0.86</b>	1.9	8	2	2330	72	85	8.8	2424
WXF5-3551-6	280	535	508	490	995	96.2	97	<b>97</b>	0.7	0.77	<b>0.82</b>	1.6	8	2	2280	76	8	2	
WXF5- 535	995	9	>	<b>2807</b>	<b>0.82</b>	11.9	8		2280	76	8	2							



## WXF4

▼ 200 ~400 2h 50Hz 2P

IE4

	kW	A			r/min	%			50%	75%	100%				kg	L <sub>PA</sub> dB(A)	L <sub>WA</sub> dB(A)	kg m <sup>2</sup>	N.m
		I <sub>N</sub> 380V	I <sub>N</sub> 400V	I <sub>N</sub> 415V		50%	75%	100%											
WXF4-80M1-2	0.75	1.64	1.56	1.51	2875	83.2	83.3	<b>83.5</b>	0.74	0.80	<b>0.83</b>	2.2	8.5	2.3	18	50	62	0.001	2.49
WXF4-80M2-2	1.1	2.36	2.25	2.16	2885	84.9	85.5	<b>85.2</b>	0.74	0.80	<b>0.83</b>	2.2	8.5	2.3	19	50	62	0.0014	3.64
WXF4-90S-2	1.5	3.1	2.94	2.84	2890	86.2	87.1	<b>86.5</b>	0.75	0.82	<b>0.85</b>	2.2	9.0	2.3	26	55	67	0.0015	4.96
WXF4-90L-2	2.2	4.42	4.2	4.04	2895	87.7	88.4	<b>88.0</b>	0.76	0.83	<b>0.86</b>	2.2	9.0	2.3	30	55	67	0.0017	7.3
WXF4-100L-2	3	5.9	5.6	5.4	2900	88.8	89.7	<b>89.1</b>	0.79	0.84	<b>0.87</b>	2.2	9.5	2.3	38	62	74	0.0055	9.9
WXF4-112M-2	4	7.7	7.3	7	2915	89.7	90.6	<b>90.0</b>	0.79	0.86	<b>0.88</b>	2.2	9.5	2.3	51	65	77	0.0075	13.1
WXF4-132S1-2	5.5	10.4	9.9	9.6	2925	90.6	91.2	<b>90.9</b>	0.79	0.86	<b>0.88</b>	2.0	9.5	2.3	73	67	79	0.015	18
WXF4-132S2-2	7.5	14	13.3	12.8	2925	91.4	92.3	<b>91.7</b>	0.80	0.86	<b>0.89</b>	2.0	9.5	2.3	80	67	79	0.019	24.5
WXF4-160M1-2	11	20.3	19.3	18.6	2940	92.3	92.9	<b>92.6</b>	0.79	0.86	<b>0.89</b>	2.0	9.5	2.3	132	68	81	0.05	35.7
WXF4-160M2-2	15	27.4	26.1	25.1	2940	92.9	93.5	<b>93.3</b>	0.79	0.86	<b>0.89</b>	2.0	9.5	2.3	140	68	81	0.059	48.7
WXF4-160L-2	18.5	33.7	32	30.9	2940	93.4	94.1	<b>93.7</b>	0.81	0.87	<b>0.89</b>	2.0	9.5	2.3	155	68	81	0.069	60
WXF4-180M-2	22	40	38	36.6	2945	93.7	94.3	<b>94.0</b>	0.81	0.87	<b>0.89</b>	2.0	9.5	2.3	195	70	83	0.1	71
WXF4-200L1-2	30	54	51	49.6	2970	94.1	94.3	<b>94.5</b>	0.82	0.87	<b>0.89</b>	2.0	9.0	2.3	256	71	84	0.2	96
WXF4-200L2-2	37	67	63	61	2970	94.2	94.7	<b>94.8</b>	0.82	0.86	<b>0.89</b>	2.0	9.0	2.3	285	71	84	0.24	119
WXF4-225M-2	45	81	77	74	2970	94.6	94.9	<b>95.0</b>	0.83	0.87	<b>0.89</b>	2.0	9.0	2.3	345	73	86	0.39	145
WXF4-250M-2	55	99	94	90	2970	94.9	95.3	<b>95.3</b>	0.83	0.87	<b>0.89</b>	2.0	9.0	2.3	450	75	89	0.49	177
WXF4-280S-2	75	134	127	123	2980	95.3	95.6	<b>95.6</b>	0.83	0.88	<b>0.89</b>	1.8	8.5	2.3	588	77	91	0.86	240
WXF4-280M-2	90	160	152	147	2980	95.5	95.8	<b>95.8</b>	0.84	0.88	<b>0.89</b>	1.8	8.5	2.3	660	77	91	1.1	288
WXF4-315S-2	110	196	186	179	2985	95.7	96.0	<b>96.0</b>	0.84	0.88	<b>0.89</b>	1.8	8.5	2.3	960	78	92	1.5	352
WXF4-315M-2	132	234	223	214	2985	95.9	96.2	<b>96.2</b>	0.84	0.88	<b>0.89</b>	1.8	8.5	2.3	1060	78	92	1.6	422
WXF4-315L1-2	160	284	269	260	2985	96.0	96.3	<b>96.3</b>	0.85	0.88	<b>0.89</b>	1.8	8.5	2.2	1185	78	92	2.1	512
WXF4-315L2-2	185	328	311	300	2985	96.1	96.4	<b>96.4</b>	0.85	0.88	<b>0.89</b>	1.8	8.5	2.2	1320	78	92	2.3	592
WXF4-315L3-2	200	354	336	324	2985	96.2	96.5	<b>96.5</b>	0.85	0.88	<b>0.89</b>	1.8	8.5	2.2	1320	78	92	2.5	640
WXF4-355M1-2	220	381	362	349	2990	96.2	96.5	<b>96.5</b>	0.87	0.89	<b>0.91</b>	1.6	8.5	2.2	1870	85	100	4.2	703
WXF4-355M2-2	250	433	411	396	2990	96.2	96.5	<b>96.5</b>	0.88	0.89	<b>0.91</b>	1.6	8.5	2.2	1950	85	100	4.9	798
WXF4-355L1-2	280	484	460	444	2990	96.2	96.5	<b>96.5</b>	0.88	0.89	<b>0.91</b>	1.6	8.5	2.2	2080	85	100	4.7	894
WXF4-355L2-2	315	545	518	499	2990	96.2	96.5	<b>96.5</b>	0.88	0.89	<b>0.91</b>	1.6	8.5	2.2	2100	85	100	6	1006
WXF4-355L1-2	355	614	583	562	2990	96.2	96.5	<b>96.5</b>	0.88	0.89	<b>0.91</b>	0.9	8.6	1.8	2220	89	104	6.8	1134

▼ 200 ~400 2h 50Hz 4P IE4





200 ~400 2h 50Hz 8P IE4

	A)			r/min	%			50%	75%	100%				kg	L <sub>PA</sub> dB(A)	L <sub>WA</sub> dB(A)	kg m <sup>2</sup>	N.m	
	kW	I <sub>N</sub> 380V	I <sub>N</sub> 400V		I <sub>N</sub> 415V	50%	75%												100%
WXF4-80M1-8	0.18	0.67	0.63	0.61	695	64.7	66.4	<b>67.2</b>	0.43	0.54	<b>0.61</b>	2.0	7.5	1.9	15	40	52	0.0021	2.47
WXF4-80M2-8	0.25	0.88	0.84	0.81	695	68.3	70.0	<b>70.8</b>	0.43	0.54	<b>0.61</b>	2.0	7.9	1.9	17	40	52	0.0023	3.44
WXF4-90S-8	0.37	1.24	1.18	1.14	700	71.8	73.4	<b>74.3</b>	0.44	0.55	<b>0.61</b>	2.0	8.3	1.9	27	44	56	0.0062	5
WXF4-90L-8	0.55	1.78	1.69	1.63	700	74.5	76.1	<b>77.0</b>	0.44	0.55	<b>0.61</b>	2.0	7.4	2.0	30	44	56	0.0081	7.5
WXF4-100L1-8	0.75	2.2	2.09	2.02	710	75.9	86.2	<b>78.4</b>	0.49	0.60	<b>0.66</b>	2.0	7.0	2.0	36	47	59	0.011	10.1
WXF4-100L2-8	1.1	3.09	2.93	2.83	710	78.3	81.8	<b>80.8</b>	0.50	0.61	<b>0.67</b>	2.0	7.0	2.0	40	47	59	0.012	14.8
WXF4-112M-8	1.5	4	3.8	3.66	710	81.4	83.5	<b>82.6</b>	0.52	0.63	<b>0.69</b>	2.0	7.0	2.0	47	49	61	0.022	20.2
WXF4-132S-8	2.2	5.7	5.4	5.2	720	83.3	85.3	<b>84.5</b>	0.54	0.64	<b>0.70</b>	1.8	7.5	2.0	62	52	64	0.027	29.2
WXF4-132M-8	3	7.6	7.2	6.9	720	84.7	86.7	<b>85.9</b>	0.54	0.64	<b>0.70</b>	1.8	7.8	2.0	73	52	64	0.03	39.8
WXF4-160M1-8	4	9.8	9.3	9	730	86.0	87.5	<b>87.1</b>	0.56	0.65	<b>0.71</b>	1.8	7.9	2.0	115	55	68	0.12	52
WXF4-160M2-8	5.5	13.1	12.5	12	730	87.4	88.7	<b>88.3</b>	0.57	0.66	<b>0.72</b>	1.8	8.1	2.0	126	55	68	0.13	72
WXF4-160L-8	7.5	17.2	16.4	15.8	730	88.4	89.7	<b>89.3</b>	0.59	0.67	<b>0.74</b>	1.8	7.8	2.0	148	55	68	0.18	98
WXF4-180L-8	11	25	23.7	22.9	735	89.5	90.4	<b>90.4</b>	0.59	0.67	<b>0.74</b>	1.8	7.9	2.0	195	57	70	0.28	143
WXF4-200L-8	15	33.3	31.7	30.5	735	90.1	91.2	<b>91.2</b>	0.61	0.70	<b>0.75</b>	1.8	8.0	2.0	245	60	73	0.42	195
WXF4-225S-8	18.5	40.9	38.8	37.4	740	90.6	91.7	<b>91.7</b>	0.61	0.70	<b>0.75</b>	1.8	8.1	2.0	285	60	73	0.55	239
WXF4-225M-8	22	47.8	45.4	43.7	740	91.1	92.1	<b>92.1</b>	0.62	0.71	<b>0.76</b>	1.8	8.3	2.0	325	60	73	1	284
WXF4-250M-8	30	64	61	58	740	91.6	92.7	<b>92.7</b>	0.64	0.72	<b>0.77</b>	1.8	7.9	2.0	420	61	75	1.4	387
WXF4-280S-8	37	77	74	71	740	92.1	93.1	<b>93.1</b>	0.64	0.73	<b>0.78</b>	1.8	7.9	2.0	550	62	76	2.8	478
WXF4-280M-8	45	94	89	86	740	92.3	93.4	<b>93.4</b>	0.65	0.73	<b>0.78</b>	1.8	7.9	2.0	605	62	76	3.5	581
WXF4-315S-8	55	111	106	102	745	92.8	93.7	<b>93.7</b>	0.69	0.75	<b>0.80</b>	1.6	8.2	2.0	960	68	82	3.6	705
WXF4-315M-8	75	151	144	138	745	93.3	94.2	<b>94.2</b>	0.69	0.75	<b>0.80</b>	1.6	7.6	2.0	1040	68	82	4.4	961
WXF4-315L1-8	90	179	170	164	745	93.3	94.4	<b>94.4</b>	0.71	0.77	<b>0.81</b>	1.6	7.7	2.0	1160	68	82	5.4	1154
WXF4-315L2-8	110	218	207	200	745	93.6	94.7	<b>94.7</b>	0.71	0.77	<b>0.81</b>	1.6	7.7	2.0	1280	68	82	6	1410
WXF4-355M1-8	132	261	248	239	745	93.8	94.9	<b>94.9</b>	0.72	0.78	<b>0.81</b>	1.6	7.7	2.0	1820	75	90	10	1692
WXF4-355M2-8	160	312	296	285	745	94.1	95.1	<b>95.1</b>	0.74	0.80	<b>0.82</b>	1.6	7.7	2.0	1960	75	90	13	2051
WXF4-355L-8	200	388	369	356	745	94.3	95.4	<b>95.4</b>	0.74	0.80	<b>0.82</b>	1.6	7.8	2.0	2105	75	90	13	2564


# WXF3

200 ~400 2h 50Hz 2P

IE3

	(kW)	A)			r/min	%			50%	75%	100%				(kg)	L <sub>PA</sub> dB(A)	L <sub>WA</sub> dB(A)	kg m <sup>2</sup>	(N.m)
		I <sub>N</sub> 380V	I <sub>N</sub> 400V	I <sub>N</sub> 415V		50%	75%	100%											
WXF3-71M1-2	0.37	0.91	0.86	0.83	2800	75.8	76.5	<b>76.4</b>	0.72	0.77	<b>0.81</b>	2.2	6.1	2.3	15	50	62	0.00065	1.26
WXF3-71M2-2	0.55	1.31	1.24	1.2	2800	77.8	78.6	<b>78.4</b>	0.73	0.79	<b>0.82</b>	2.2	6.1	2.3	16	50	62	0.00078	1.88
WXF3-80M1-2	0.75	1.72	1.64	1.58	2860	79.3	81.1	<b>80.7</b>	0.73	0.79	<b>0.82</b>	2.3	7.0	2.3	14	50	62	0.00099	2.5
WXF3-80M2-2	1.1	2.43	2.31	2.23	2880	79.6	82.5	<b>82.7</b>	0.73	0.76	<b>0.83</b>	2.2	7.3	2.3	15	50	62	0.0013	3.65
WXF3-90S-2	1.5	3.22	3.06	2.95	2885	84.1	84.9	<b>84.2</b>	0.74	0.81	<b>0.84</b>	2.2	7.6	2.3	23	55	67	0.0014	4.97
WXF3-90L-2	2.2	4.58	4.35	4.19	2870	85.8	86.5	<b>85.9</b>	0.74	0.82	<b>0.85</b>	2.2	7.6	2.3	26	55	67	0.0016	7.3
WXF3-100L-2	3	6	5.7	5.5	2900	86.2	87.4	<b>87.1</b>	0.79	0.84	<b>0.87</b>	2.2	7.8	2.3	37	62	74	0.0053	9.9
WXF3-112M-2	4	7.8	7.4	7.2	2900	88.7	89.2	<b>88.1</b>	0.78	0.85	<b>0.88</b>	2.2	8.3	2.3	41	65	77	0.0069	13.2
WXF3-132S1-2	5.5	10.6	10.1	9.7	2920	88.9	89.6	<b>89.2</b>	0.78	0.85	<b>0.88</b>	2.0	8.3	2.3	59	67	79	0.014	18
WXF3-132S2-2	7.5	14.4	13.7	13.2	2905	89.9	90.6	<b>90.1</b>	0.79	0.85	<b>0.88</b>	2.0	7.9	2.3	67	67	79	0.018	24.7
WXF3-160M1-2	11	20.6	19.6	18.9	2940	89.9	91.1	<b>91.2</b>	0.78	0.86	<b>0.89</b>	2.0	8.1	2.3	117	68	81	0.046	35.7
WXF3-160M2-2	15	27.9	26.5	25.5	2930	91.3	92.1	<b>91.9</b>	0.79	0.86	<b>0.89</b>	2.0	8.1	2.3	122	68	81	0.053	48.9
WXF3-160L-2	18.5	34.2	32.5	31.3	2930	92.2	92.7	<b>92.4</b>	0.81	0.87	<b>0.89</b>	2.0	8.2	2.3	134	68	81	0.063	60
WXF3-180M-2	22	40.5	38.5	37.1	2945	92.1	92.9	<b>92.7</b>	0.81	0.87	<b>0.89</b>	2.0	8.2	2.3	168	70	83	0.092	71
WXF3-200L1-2	30	55	52	50	2970	91.3	92.9	<b>93.3</b>	0.80	0.87	<b>0.89</b>	2.0	7.6	2.3	253	71	84	0.18	96
WXF3-200L2-2	37	67	64	62	2970	91.8	93.3	<b>93.7</b>	0.78	0.86	<b>0.89</b>	2.0	7.6	2.3	271	71	84	0.22	119
WXF3-225M-2	45	81	77	74	2970	92.4	94.0	<b>94.0</b>	0.83	0.88	<b>0.90</b>	2.0	7.7	2.3	323	73	86	0.36	145
WXF3-250M-2	55	98	94	90	2970	93.0	94.3	<b>94.3</b>	0.78	0.86	<b>0.90</b>	2.0	7.7	2.3	417	75	89	0.45	177
WXF3-280S-2	75	134	127	122	2980	93.5	94.7	<b>94.7</b>	0.83	0.87	<b>0.90</b>	1.8	7.1	2.3	530	77	91	0.82	240
WXF3-280M-2	90	160	152	146	2980	93.3	95.0	<b>95.0</b>	0.80	0.87	<b>0.90</b>	1.8	7.1	2.3	665	77	91	1	288
WXF3-315S-2	110	195	185	179	2985	93.8	95.2	<b>95.2</b>	0.86	0.89	<b>0.90</b>	1.8	7.1	2.3	944	78	92	1.4	352
WXF3-315M-2	132	234	222	214	2985	94.0	95.4	<b>95.4</b>	0.84	0.87	<b>0.90</b>	1.8	7.1	2.3	1054	78	92	1.5	422
WXF3-315L1-2	160	279	265	256	2985	94.7	95.6	<b>95.6</b>	0.85	0.88	<b>0.91</b>	1.8	7.2	2.3	1149	78	92	2	512
WXF3-315L2-2	185	323	307	296	2985	94.6	95.7	<b>95.7</b>	0.86	0.88	<b>0.91</b>	1.8	7.2	2.2	1209	78	92	2.2	592
WXF3-315L3-2	200	349	331	319	2985	95.2	95.8	<b>95.8</b>	0.87	0.89	<b>0.91</b>	1.8	7.2	2.2	1249	78	92	2.4	640
WXF3-355M1-2	220	383	364	351	2990	95.5	95.8	<b>95.8</b>	0.87	0.89	<b>0.91</b>	1.6	7.2	2.2	1699	85	100	4	703
WXF3-355M2-2	250	436	414	399	2990	95.4	95.8	<b>95.8</b>	0.88	0.89	<b>0.91</b>	1.6	7.2	2.2	1716	85	100	4.7	798
WXF3-355L1-2	280	488	464	447	2990	94.8	95.8	<b>95.8</b>	0.88	0.89	<b>0.91</b>	1.6	7.2	2.2	2068	85	100	4.3	894
WXF3-355L2-2	315	549	522	503	2990	95.3	95.8	<b>95.8</b>	0.88	0.89	<b>0.91</b>	1.6	7.2	2.2	2091	85	100	5.7	1006
WXF3-3551-2	355	619	588	567	2990	95.3	95.8	<b>95.8</b>	0.88	0.89	<b>0.91</b>	1.6	7.2	2.2	2406	89	104	6.5	1134
WXF3-3552-2	375	654	621	598	2990	95.3	95.8	<b>95.8</b>	0.88	0.89	<b>0.91</b>	1.6	7.2	2.2	2419	89	104	6.5	1198

▼ 200 ~400 2h 50Hz 4P IE3

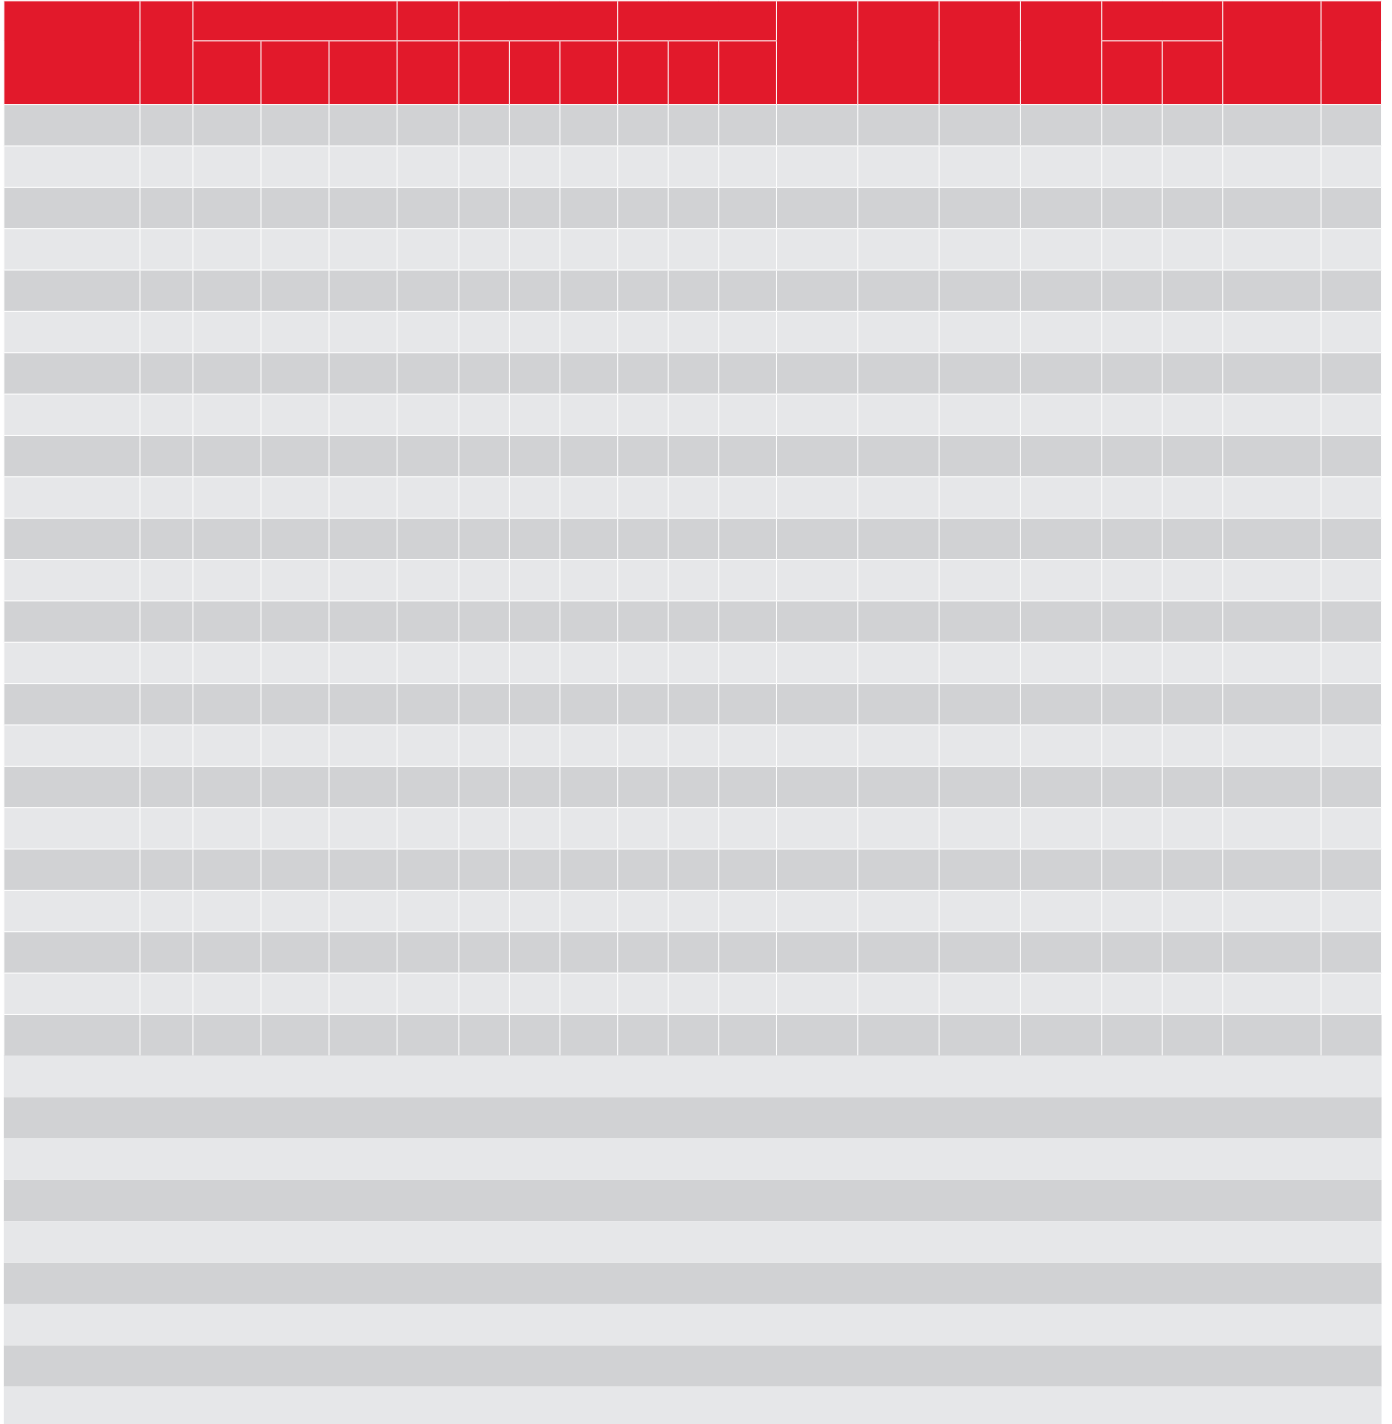



200 ~400 2h 50Hz 8P IE3

	(kW)	A)			r/min	%			50%	75%	100%				kg	L <sub>PA</sub> dB(A)		L <sub>WA</sub> dB(A)	kg m <sup>2</sup>	(N.m)
		I <sub>n</sub> 380V	I <sub>n</sub> 400V	I <sub>n</sub> 415V		50%	75%	100%								L <sub>PA</sub> dB(A)	L <sub>WA</sub> dB(A)			
WXF3-80M1-8	0.18	0.76	0.73	0.7	695	54.6	59.1	<b>58.7</b>	0.40	0.50	<b>0.61</b>	1.8	3.3	1.9	17	40	52	0.0033	2.47	
WXF3-80M2-8	0.25	0.97	0.92	0.89	695	59.8	64.2	<b>64.1</b>	0.39	0.50	<b>0.61</b>	1.8	3.3	1.9	19	40	52	0.004	3.44	
WXF3-90S-8	0.37	1.33	1.26	1.22	700	67.1	71.1	<b>69.3</b>	0.42	0.54	<b>0.61</b>	1.8	4.0	1.9	22	44	56	0.0049	5	
WXF3-90L-8	0.55	1.88	1.78	1.72	700	69.7	73.3	<b>73.0</b>	0.43	0.55	<b>0.61</b>	1.8	4.0	2.0	25	44	56	0.0061	7.5	
WXF3-100L1-8	0.75	2.27	2.15	2.08	710	74.3	76.0	<b>75.0</b>	0.53	0.64	<b>0.67</b>	1.8	4.0	2.0	34	47	59	0.013	10.1	
WXF3-100L2-8	1.1	3.12	2.96	2.85	710	77.3	78.2	<b>77.7</b>	0.54	0.67	<b>0.69</b>	1.8	5.0	2.0	38	47	59	0.016	14.8	
WXF3-112M-8	1.5	4.14	3.94	3.79	710	79.2	81.3	<b>79.7</b>	0.53	0.65	<b>0.69</b>	1.8	5.0	2.0	41	49	61	0.023	20.2	
WXF3-132S-8	2.2	5.7	5.5	5.3	715	81.2	82.2	<b>81.9</b>	0.52	0.65	<b>0.71</b>	1.8	6.0	2.0	58	52	64	0.03	29.4	
WXF3-132M-8	3	7.5	7.1	6.8	715	83.1	84.0	<b>83.5</b>	0.50	0.63	<b>0.73</b>	1.8	6.0	2.0	73	52	64	0.04	40.1	
WXF3-160M1-8	4	9.8	9.3	9	730	85.2	86.3	<b>84.8</b>	0.52	0.65	<b>0.73</b>	1.9	6.0	2.0	102	55	68	0.092	52	
WXF3-160M2-8	5.5	13.1	12.4	12	725	86.4	86.5	<b>86.2</b>	0.55	0.69	<b>0.74</b>	2.0	6.0	2.0	109	55	68	0.11	72	
WXF3-160L-8	7.5	17.4	16.5	15.9	730	87.1	88.0	<b>87.3</b>	0.54	0.67	<b>0.75</b>	2.0	6.0	2.0	130	55	68	0.14	98	
WXF3-180L-8	11	24.8	23.6	22.7	730	88.6	89.6	<b>88.6</b>	0.56	0.68	<b>0.76</b>	2.0	6.6	2.0	193	57	70	0.28	144	
WXF3-200L-8	15	33.5	31.8	30.6	735	89.4	90.0	<b>89.6</b>	0.58	0.70	<b>0.76</b>	2.0	6.6	2.0	259	60	73	0.56	195	
WXF3-225S-8	18.5	41	39	37.6	735	90.0	90.9	<b>90.1</b>	0.61	0.72	<b>0.76</b>	1.9	6.6	2.0	287	60	73	0.86	240	
WXF3-225M-8	22	47.3	44.9	43.3	735	90.4	91.2	<b>90.6</b>	0.62	0.73	<b>0.78</b>	1.9	6.6	2.0	330	60	73	0.97	286	
WXF3-250M-8	30	63	60	58	740	91.2	91.6	<b>91.3</b>	0.65	0.76	<b>0.79</b>	1.9	6.6	2.0	452	61	75	1.5	387	
WXF3-280S-8	37	78	74	71	740	91.8	92.2	<b>91.8</b>	0.70	0.80	<b>0.79</b>	1.9	6.6	2.0	484	62	76	2.8	478	
WXF3-280M-8	45	94	89	86	740	92.1	92.5	<b>92.2</b>	0.70	0.80	<b>0.79</b>	1.9	6.6	2.0	623	62	76	3.3	581	
WXF3-315S-8	55	112	106	102	740	92.1	92.7	<b>92.5</b>	0.66	0.77	<b>0.81</b>	1.8	6.6	2.0	927	68	82	5.2	710	
WXF3-315M-8	75	151	144	138	740	92.7	93.4	<b>93.1</b>	0.68	0.78	<b>0.81</b>	1.8	6.6	2.0	1085	68	82	6.4	968	
WXF3-315L1-8	90	179	170	163	740	92.9	93.6	<b>93.4</b>	0.68	0.78	<b>0.82</b>	1.8	6.6	2.0	1213	68	82	7.3	1161	
WXF3-315L2-8	110	218	207	199	740	93.1	93.9	<b>93.7</b>	0.70	0.79	<b>0.82</b>	1.8	6.4	2.0	1288	68	82	8.4	1420	
WXF3-355M1-8	132	260	247	238	745	93.3	94.0	<b>94.0</b>	0.71	0.79	<b>0.82</b>	1.8	6.4	2.0	1523	75	90	13	1692	
WXF3-355M2-8	160	314	299	288	745	93.7	94.3	<b>94.3</b>	0.73	0.80	<b>0.82</b>	1.8	6.4	2.0	1640	75	90	15	2051	
WXF3-355L-8	200	387	368	354	745	93.9	94.6	<b>94.6</b>	0.72	0.80	<b>0.83</b>	1.8	6.4	2.0	1993	75	90	17	2564	

## W XF2

200 ~400 2h 50Hz 2P

IE2

	(kW)	A)			r/min	%			50%	75%	100%				kg	L <sub>PA</sub> dB(A)	L <sub>WA</sub> dB(A)	kg m <sup>2</sup>	(N.m)
		I <sub>N</sub> 380V	I <sub>N</sub> 400V	I <sub>N</sub> 415V		50%	75%	100%											
W XF2-71M1-2	0.37	1	0.95	0.92	2800	66.5	69.8	<b>69.5</b>	0.61	0.73	<b>0.81</b>	2.2	6.1	2.2	15	50	62	0.00047	1.26
W XF2-71M2-2	0.55	1.38	1.35	1.26	2800	71.3	74.2	<b>74.1</b>	0.63	0.75	<b>0.82</b>	2.2	6.1	2.2	16	50	62	0.0006	1.88
W XF2-80M1-2	0.75	1.80	1.71	1.64	2855	77.1	77.8	<b>77.4</b>	0.73	0.79	<b>0.82</b>	2.3	6.8	2.3	13	50	62	0.00081	2.51
W XF2-80M2-2	1.1	2.53	2.4	2.32	2875	78.9	81.2	<b>79.6</b>	0.74	0.81	<b>0.83</b>	2.3	7.1	2.3	14	50	62	0.0012	3.65
W XF2-90S-2	1.5	3.34	3.17	3.06	2880	80.0	82.1	<b>81.3</b>	0.75	0.82	<b>0.84</b>	2.3	7.3	2.3	21	55	67	0.0013	4.97
W XF2-90L-2	2.2	4.73	4.49	4.33	2880	82.1	83.9	<b>83.2</b>	0.74	0.82	<b>0.85</b>	2.3	7.6	2.3	26	55	67	0.0016	7.3
W XF2-100L-2	3	6.2	5.9	5.7	2895	83.5	85.3	<b>84.6</b>	0.79	0.84	<b>0.87</b>	2.2	7.8	2.3	34	62	74	0.005	9.9
W XF2-112M-2	4	8	7.6	7.4	2900	84.9	86.5	<b>85.8</b>	0.78	0.85	<b>0.88</b>	2.2	8.1	2.3	39	65	77	0.0062	13.2
W XF2-132S1-2	5.5	10.9	10.4	10	2910	86.5	87.6	<b>87.0</b>	0.78	0.85	<b>0.88</b>	2.2	8.2	2.3	55	67	79	0.011	18
W XF2-132S2-2	7.5	14.5	13.8	13.3	2910	87.4	88.8	<b>88.1</b>	0.79	0.85	<b>0.89</b>	2.2	7.8	2.3	63	67	79	0.017	24.6
W XF2-160M1-2	11	21	20	19.2	2930	88.9	89.8	<b>89.4</b>	0.78	0.86	<b>0.89</b>	2.2	7.9	2.3	110	68	81	0.042	35.9
W XF2-160M2-2	15	28.4	26.9	26	2930	89.5	91.1	<b>90.3</b>	0.79	0.86	<b>0.89</b>	2.2	7.9	2.3	115	68	81	0.049	48.9
W XF2-160L-2	18.5	34.7	33	31.8	2930	90.1	91.7	<b>90.9</b>	0.81	0.87	<b>0.89</b>	2.2	8.0	2.3	136	68	81	0.063	60
W XF2-180M-2	22	41.1	39.1	37.7	2945	90.8	91.9	<b>91.3</b>	0.81	0.87	<b>0.89</b>	2.2	8.1	2.3	163	70	83	0.089	71
W XF2-200L1-2	30	56	53	51	2950	91.5	92.4	<b>92.0</b>	0.80	0.87	<b>0.89</b>	2.0	7.5	2.3	242	71	84	0.17	97
W XF2-200L2-2	37	68	65	63	2950	91.9	92.8	<b>92.5</b>	0.79	0.86	<b>0.89</b>	2.0	7.5	2.3	256	71	84	0.2	120
W XF2-225M-2	45	83	79	76	2960	92.3	92.9	<b>92.9</b>	0.80	0.87	<b>0.89</b>	2.2	7.5	2.3	318	73	86	0.36	145
W XF2-250M-2	55	101	96	92	2965	92.7	93.2	<b>93.2</b>	0.79	0.86	<b>0.89</b>	2.2	7.6	2.3	384	75	89	0.42	177
W XF2-280S-2	75	136	130	125	2970	93.3	93.8	<b>93.8</b>	0.80	0.87	<b>0.89</b>	1.8	6.9	2.3	504	77	91	0.8	241
W XF2-280M-2	90	163	155	150	2980	93.6	94.1	<b>94.1</b>	0.80	0.87	<b>0.89</b>	1.8	6.9	2.3	634	77	91	0.99	288
W XF2-315S-2	110	197	187	180	2985	93.7	94.3	<b>94.3</b>	0.81	0.88	<b>0.90</b>	1.8	7.0	2.2	886	78	92	1.3	352
W XF2-315M-2	132	236	224	216	2985	94.1	94.6	<b>94.6</b>	0.80	0.87	<b>0.90</b>	1.8	7.0	2.2	999	78	92	1.4	422
W XF2-315L1-2	160	282	268	258	2985	94.3	94.8	<b>94.8</b>	0.82	0.88	<b>0.91</b>	1.8	7.1	2.2	1140	78	92	2	512
W XF2-315L2-2	185	325	309	298	2985	94.4	94.9	<b>94.9</b>	0.81	0.87	<b>0.91</b>	1.8	7.1	2.2	1206	78	92	2.2	592
W XF2-315L3-2	200	351	334	322	2985	94.5	95.0	<b>95.0</b>	0.81	0.87	<b>0.91</b>	1.8	7.1	2.2	1246	78	92	2.4	640
W XF2-355M1-2	220	387	367	354	2990	94.5	95.0	<b>95.0</b>	0.81	0.87	<b>0.91</b>	1.6	7.1	2.2	1694	85	100	4	703
W XF2-355M2-2	250	439	417	402	2990	94.5	95.0	<b>95.0</b>	0.82	0.88	<b>0.91</b>	1.6	7.1	2.2	1711	85	100	4.7	798
W XF2-355L1-2	280	492	467	451	2990	94.5	95.0	<b>95.0</b>	0.82	0.88	<b>0.91</b>	1.6	7.2	2.2	2068	85	100	4.3	894
W XF2-355L2-2	315	554	526	507	2990	94.5	95.0	<b>95.0</b>	0.82	0.88	<b>0.91</b>	1.6	7.2	2.2	2091	85	100	5.7	1006
W XF2-355L3-2	355	624	593	571	2990	94.5	95.0	<b>95.0</b>	0.82	0.88	<b>0.91</b>	1.6	7.5	2.2	2332	89	104	6.5	1134
W XF2-355S2-2	375	659	626	603	2990	94.5	95.0	<b>95.0</b>	0.82	0.88	<b>0.91</b>	1.6	7.5	2.2	2350	89	104	6.5	1198



200 ~400 2h 50Hz 6P IE2

	(kW)	A)			r/min	%			50%	75%	100%				(kg)			kg m <sup>2</sup>	(N.m)
		I <sub>N</sub> 380V	I <sub>N</sub> 400V	I <sub>N</sub> 415V		50%	75%	100%								L <sub>PA</sub> dB(A)	L <sub>WA</sub> dB(A)		
WXF2-71M1-6	0.18	0.75	0.71	0.69	900	52.2	57	<b>56.6</b>	0.45	0.56	<b>0.66</b>	1.9	4	2	14	40	52	0.00122	1.91
WXF2-71M2-6	0.25	0.9	0.86	0.83	900	58.4	62.3	<b>61.6</b>	0.47	0.58	<b>0.68</b>	1.9	4	2	15	40	52	0.00138	2.65
WXF2-80M1-6	0.37	1.19	1.13	1.09	925	66.9	67.2	<b>67.6</b>	0.50	0.62	<b>0.70</b>	1.9	5.8	2.0	16	42	54	0.002	3.82
WXF2-80M2-6	0.55	1.59	1.51	1.45	925	72.4	72.7	<b>73.1</b>	0.50	0.62	<b>0.72</b>	1.9	5.8	2.1	17	42	54	0.003	5.7
WXF2-90S-6	0.75	2.11	2.01	1.94	935	75.4	76.3	<b>75.9</b>	0.51	0.64	<b>0.71</b>	2.0	5.8	2.1	22	42	57	0.005	7.7
WXF2-90L-6	1.1	2.97	2.82	2.72	935	77.6	78.6	<b>78.1</b>	0.52	0.65	<b>0.72</b>	2.0	5.9	2.1	25	45	57	0.007	11.2
WXF2-100L-6	1.5	3.97	3.77	3.63	940	79.3	80.3	<b>79.8</b>	0.52	0.65	<b>0.72</b>	2.0	5.9	2.1	36	49	61	0.013	15.2
WXF2-112M-6	2.2	5.7	5.4	5.2	945	81.4	82.3	<b>81.8</b>	0.53	0.65	<b>0.72</b>	2.0	6.2	2.1	42	53	65	0.019	22.2
WXF2-132S-6	3	7.6	7.2	7	950	82.8	83.8	<b>83.3</b>	0.53	0.65	<b>0.72</b>	2.0	6.4	2.1	53	57	69	0.027	30.2
WXF2-132M1-6	4	9.7	9.2	8.9	950	84.1	87.1	<b>84.6</b>	0.57	0.68	<b>0.74</b>	2.0	6.6	2.1	62	57	69	0.03	40.2
WXF2-132M2-6	5.5	13	12.3	11.9	950	85.6	86.5	<b>86.0</b>	0.58	0.69	<b>0.75</b>	2.0	6.8	2.1	75	57	69	0.041	55
WXF2-160M-6	7.5	16.8	15.9	15.3	960	86.8	87.7	<b>87.2</b>	0.61	0.72	<b>0.78</b>	2.0	6.8	2.1	110	60	73	0.099	75
WXF2-160L-6	11	23.9	22.7	21.8	965	88.3	89.2	<b>88.7</b>	0.62	0.73	<b>0.79</b>	2.0	6.9	2.1	135	60	73	0.17	109
WXF2-180L-6	15	31	29.4	28.4	970	89.3	90.2	<b>89.7</b>	0.68	0.77	<b>0.82</b>	2.0	7.3	2.1	189	60	73	0.25	148
WXF2-200L1-6	18.5	38.9	36.9	35.6	975	89.7	90.4	<b>90.4</b>	0.68	0.76	<b>0.80</b>	2.0	7.2	2.1	223	60	73	0.38	181
WXF2-200L2-6	22	45.4	43.1	41.6	975	90.4	90.9	<b>90.9</b>	0.68	0.77	<b>0.81</b>	2.0	7.3	2.1	242	60	73	0.4	215
WXF2-225M-6	30	61	58	56	980	91.2	91.7	<b>91.7</b>	0.70	0.78	<b>0.82</b>	2.0	6.8	2.1	328	61	74	0.9	292
WXF2-250M-6	37	73	70	67	985	91.7	92.2	<b>92.2</b>	0.71	0.79	<b>0.83</b>	2.0	7.0	2.1	423	62	76	1	359
WXF2-280S-6	45	87	82	79	985	92.2	92.7	<b>92.7</b>	0.73	0.80	<b>0.85</b>	2.0	7.2	2.0	467	64	78	2.1	436
WXF2-280M-6	55	104	99	96	985	92.6	93.1	<b>93.1</b>	0.75	0.82	<b>0.86</b>	2.0	7.2	2.0	597	64	78	2.9	533
WXF2-315S-6	75	145	138	133	990	93.2	93.7	<b>93.7</b>	0.74	0.80	<b>0.84</b>	2.0	6.5	2.0	925	69	83	3.4	723
WXF2-315M-6	90	171	163	157	990	93.6	94.0	<b>94.0</b>	0.73	0.80	<b>0.85</b>	2.0	6.6	2.0	1040	69	83	4	868
WXF2-315L1-6	110	209	198	191	990	94.0	94.3	<b>94.3</b>	0.74	0.81	<b>0.85</b>	2.0	6.6	2.0	1165	69	83	5	1061
WXF2-315L2-6	132	247	234	226	990	94.3	94.6	<b>94.6</b>	0.75	0.83	<b>0.86</b>	2.0	6.6	2.0	1233	69	83	6	1273
WXF2-355M1-6	160	298	283	273	995	94.3	94.8	<b>94.8</b>	0.75	0.83	<b>0.86</b>	2.0	6.7	2.0	1459	70	85	9.1	1536
WXF2-355M2-6	200	372	353	341	995	94.6	95.0	<b>95.0</b>	0.75	0.83	<b>0.86</b>	2.0	6.8	2.0	1617	70	85	12	1920
WXF2-355L1-6	220	409	389	375	995	94.6	95.0	<b>95.0</b>	0.75	0.83	<b>0.86</b>	2.0	6.8	2.0	1936	70	85	13	2112
WXF2-355L2-6	250	465	442	426	995	94.6	95.0	<b>95.0</b>	0.75	0.83	<b>0.86</b>	2.0	6.8	2.0	1956	76	91	14	2399
WXF2-355L1-6	280	521	495	477	995	94.7	95.0	<b>95.0</b>	0.76	0.84	<b>0.86</b>	2.0	7.1	2.0	1981	76	91	15	2687
WXF2-355L2-6	315	586	557	536	995	94.7	95.0	<b>95.0</b>	0.76	0.84	<b>0.86</b>	2.0	7.1	2.0	2046	76	91	16	3023

200 ~400 2h 50Hz 8P IE2


	(kW)	A)			r/min	%			50%	75%	100%				(kg)			kg m <sup>2</sup>	(N.m)
		I <sub>N</sub> 380V	I <sub>N</sub> 400V	I <sub>N</sub> 415V		50%	75%	100%								L <sub>PA</sub> dB(A)	L <sub>WA</sub> dB(A)		
WXF2-80M1-8	0.18	0.98	0.93	0.89	680	42.3	46.0	45.9	0.41	0.52	0.61	1.8	5.1	1.9	16	40	52	0.0027	2.53
WXF2-80M2-8	0.25	1.23	1.17	1.13	680	47.5	50.9	50.6	0.42	0.53	0.61	1.8	5.5	1.9	18	40	52	0.0033	3.51
WXF2-90S-8	0.37	1.64	1.56	1.5	700	56.0	57.4	56.1	0.50	0.63	0.61	1.8	6.0	1.9	22	44	56	0.0046	5
WXF2-90L-8	0.55	2.22	2.11	2.03	700	60.8	62.7	61.7	0.48	0.61	0.61	1.8	5.8	2.0	25	44	56	0.0058	7.5
WXF2-100L1-8	0.75	2.57	2.44	2.35	710	67.2	68.2	66.2	0.56	0.69	0.67	1.8	6.1	2.0	32	47	59	0.01	10.1
WXF2-100L2-8	1.1	3.42	3.25	3.13	710	71.3	72.3	70.8	0.56	0.69	0.69	1.8	6.1	2.0	35	47	59	0.012	14.8
WXF2-112M-8	1.5	4.39	4.17	4.02	715	73.8	75.2	74.1	0.53	0.66	0.70	1.8	6.4	2.0	39	49	61	0.019	20
WXF2-132S-8	2.2	6.1	5.8	5.6	720	78.5	79.0	77.6	0.57	0.70	0.71	1.8	6.4	2.0	58	52	64	0.028	29.2
WXF2-132M-8	3	7.8	7.4	7.1	720	81.1	81.5	80.0	0.58	0.70	0.73	1.8	6.8	2.0	69	52	64	0.034	39.8
WXF2-160M1-8	4	10.2	9.7	9.3	725	81.2	82.1	81.9	0.57	0.70	0.73	1.9	6.8	2.0	99	55	68	0.081	53
WXF2-160M2-8	5.5	13.5	12.8	12.3	725	83.5	84.2	83.8	0.59	0.71	0.74	1.9	6.7	2.0	106	55	68	0.094	72
WXF2-160L-8	7.5	17.8	16.9	16.3	725	85.6	86.2	85.3	0.60	0.72	0.75	1.9	6.4	2.0	124	55	68	0.12	99
WXF2-180L-8	11	25.6	24.4	23.5	730	85.8	87.0	86.9	0.58	0.70	0.75	2.0	6.5	2.0	186	57	70	0.24	144
WXF2-200L-8	15	34.1	32.4	31.2	735	87.4	88.3	88.0	0.60	0.72	0.76	2.0	6.6	2.0	246	60	73	0.49	195
WXF2-225S-8	18.5	41.7	39.7	38.2	735	88.2	88.9	88.6	0.62	0.73	0.76	1.9	6.6	2.0	272	60	73	0.75	240
WXF2-225M-8	22	48.1	45.7	44	735	88.3	89.3	89.1	0.64	0.74	0.78	1.9	6.6	2.0	313	60	73	0.83	286
WXF2-250M-8	30	64	61	59	735	89.6	90.1	89.8	0.67	0.77	0.79	1.9	6.5	2.0	433	61	75	1.4	390
WXF2-280S-8	37	79	75	72	740	89.9	90.5	90.3	0.70	0.79	0.79	1.9	6.5	2.0	474	62	76	2.6	478
WXF2-280M-8	45	95	91	87	740	90.4	90.9	90.7	0.72	0.81	0.79	1.9	6.5	2.0	603	62	76	2.9	581
WXF2-315S-8	55	113	108	104	740	90.0	91.0	91.0	0.68	0.78	0.81	1.8	6.6	2.0	895	68	82	4.7	710
WXF2-315M-8	75	154	146	141	740	90.6	91.6	91.6	0.69	0.79	0.81	1.8	6.1	2.0	1052	68	82	5.8	968
WXF2-315L1-8	90	181	172	166	740	90.9	91.9	91.9	0.69	0.79	0.82	1.8	6.2	2.0	1173	68	82	6.6	1161
WXF2-315L2-8	110	221	210	202	740	91.3	92.3	92.3	0.69	0.79	0.82	1.8	6.3	2.0	1240	68	82	7.5	1420
WXF2-355M1-8	132	264	251	242	745	91.6	92.6	92.6	0.69	0.78	0.82	1.8	6.3	2.0	1479	75	89	12	1692
WXF2-355M2-8	160	319	303	292	745	92.0	93.0	93.0	0.70	0.79	0.82	1.8	6.3	2.0	1568	75	89	13	2051
WXF2-355L-8	200	392	372	359	745	92.6	93.5	93.5	0.70	0.79	0.83	1.8	6.4	2.0	1945	75	89	16	2564

22 B397  
nl J8

B3

▼ WXF5-80-355

B3







24 B397  
nl J8

▼ WXF4 WXF3 WXF2-80-355

B3



 WXF 4-80-355

## B3



		(mm)										mm								
		A	B	C	D	E	F	G	H	K	AB	AC	HF	HD	AA	BB	CC	L	L	L
80M	2-8	125	100	50	19	40	6	15.5	80	10	157	163	-	190	146	15	32	20	142	275
90S	2-8	140	100	56	24	50	8	20	90	10	172	177	-	205	153	16.6	37	25	153	315
90L	2-8	140	125	56	24	50	8	20	90	10	172	177	-	205	175	16.6	37	25	175	330
100L	2-8	160	140	63	28	60	8	24	100	12	200	208	-	230	198	19	45	25	207	375
112M	2-8	190	140	70	28	60	8	24	112	12	228	226	-	260	201	19	45	25	200	400
132S	2-8	216	140	89	38	80	10	33	132	12	262	252	-	280	184	21.5	56.5	25	218	422
132M	2-8	216	178	89	38	80	10	33	132	12	262	252	-	280	222	21.5	56.5	25	256	460
160M	2-8	254	210	108	42	110	12	37	160	14.5	314	318	-	355	280	46	65	25	280	556
160L	2-8	254	254	108	42	110	12	37	160	14.5	314	318	-	355	324	46	65	25	320	600
180M	2-8	279	241	121	48	110	14	42.5	180	14.5	349	360	-	395	297	26.5	68	25	322	622
180L	2-8	279	279	121	48	110	14	42.5	180	14.5	349	360	-	395	335	26.5	68	25	360	660
200L	2-8	318	305	133	55	110	16	49	200	18.5	388	396	432	435	380	30	84	30	380	725
225S	2-8	356	286	149	60	140	18	53	225	18.5	431	442	467	480	368	43	84	30	380	741
225M	2	356	311	149	55	110	16	49	225	18.5	431	442	467	480	368	30.5	84	30	405	736
225M	4-8	356	311	149	60	140	18	53	225	18.5	431	442	467	480	368	30.5	84	30	405	766
250M	2	406	349	168	60	140	18	53	250	24	484	488	502	525	421	43	80	30	446	829
250M	4-8	406	349	168	65	140	18	58	250	24	484	488	502	525	421	43	80	30	446	829
280S	2	457	368	190	65	140	18	58	280	24	542	547	583	585	460	55	84	30	504	888
280S	4-8	457	368	190	75	140	20	67.5	280	24	542	547	583	585	460	55	84	35	504	893
280M	2	457	419	190	65	140	18	58	280	24	542	547	583	585	515	58.5	84	30	542	936
280M	4-8	457	419	190	75	140	20	67.5	280	24	542	547	583	585	515	58.5	84	35	542	941
315S	2	508	406	216	65	140	18	58	315	28	628	631	670	675	540	46	115	30	611.5	1036
315S	4-8	508	406	216	80	170	22	71	315	28	628	631	670	675	540	46	115	35	611.5	1071
315M	2	508	457	216	65	140	18	58	315	28	628	631	670	675	640	46	115	30	711.5	1136
315M	4-8	508	457	216	80	170	22	71	315	28	628	631	670	675	640	46	115	35	711.5	1171
315L	2	508	508	216	65	140	18	58	315	28	628	631	670	675	640	46	115	30	711.5	1136
315L	4-8	508	508	216	80	170	22	71	315	28	628	631	670	675	640	46	115	35	711.5	1171
355M	2	610	560	254	75	140	20	67.5	355	28	740	710	766	825	700	40.5	146	35	798.5	1286
355M	4-8	610	560	254	95	170	25	86	355	28	740	710	766	825	700	40.5	146	40	798.5	1321
355L	2	610	630	254	75	140	20	67.5	355	28	740	710	766	825	887	49	146	35	968.5	1456
355L	4-8	610	630	254	95	170	25	86	355	28	740	710	766	825	887	49	146	40	968.5	1491



▼ WXF 4-80-280

-PAD

PAD  
80-280

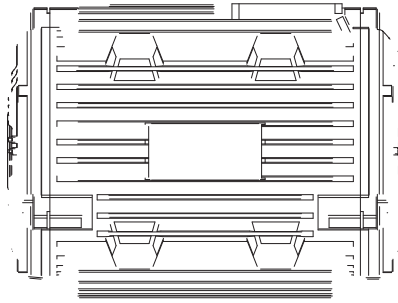




## PAD

		(mm)							mm						
		B	C	D	E	F	G	K M	AC	H	HC	BB	AD	L	L
80M	2-8	80	70	19	40	6	15.5	M12× 1.75-18	165	89	178	110	97	20	275
90S	2-8	90	82.5	24	50	8	20	M12× 1.75-18	177	95	190	127.5	104	25	326
90L	2-8	90	82.5	24	50	8	20	M12× 1.75-18	177	95	190	127.5	104	25	326
100L	2-8	100	93	28	60	8	24	M12× 1.75-18	208	105	210	143	120	25	368
112M	2-8	100	102	28	60	8	24	M12× 1.75-18	224	117	234	152	133	25	385
132S	2-8	140	110	38	80	10	33	M16× 2-24	255	140	280	180	145	25	460
132M	2-8	140	110	38	80	10	33	M16× 2-24	255	140	280	180	145	25	460
160M	2-8	200	125	42	110	12	37	M20× 2.5-25	315	168	336	225	185	25	583
160L	2-8	200	125	42	110	12	37	M20× 2.5-25	315	168	336	225	185	25	583
180M	2-8	200	165	48	110	14	42.5	M20× 2.5-30	355	189.5	379	265	205	25	660
180L	2-8	200	165	48	110	14	42.5	M20× 2.5-30	355	189.5	379	265	205	25	660
200L	2-8	224	182	55	110	16	49	M24× 3-45	392	220	440	294	220	30	719
225S	4-8	224	191.5	60	140	18	53	M24× 3-45	440	245	490	303.5	245	30	767
225M	2	224	191.5	55	110	16	49	M24× 3-45	440	245	490	303.5	245	30	737
225M	4-8	224	191.5	60	140	18	53	M24× 3-45	440	245	490	303.5	245	30	767
250M	2	224	225.5	60	140	18	53	M24× 3-45	490	272	544	337.5	270	30	835
250M	4-8	224	225.5	65	140	18	58	M24× 3-45	490	272	544	337.5	270	30	835
280S	2	300	260	65	140	18	58	M36× 4-50	550	304	608	410	335	30	969
280S	4-8	300	260	75	140	20	67.5	M36× 4-50	550	304	608	410	335	35	974
280M	2	300	260	65	140	18	58	M36× 4-50	550	304	608	410	335	30	969
280M	4-8	300	260	75	140	20	67.5	M36× 4-50	550	304	608	410	335	35	974





PT100	
0	100 ± 0.12 B
	U —PU1 PU2 PU2 V —PV1 PV2 PV2 W —PW1 PW2 PW2 U —PU3 PU4 PU4 V —PV3 PV4 PV4 W — PW3 PW4 PW4
	U 



- 380V 400V 415V
- 50Hz 60Hz
- IMB3 PAD
- IP55 IP54
- S2 +200 /2h +300 /2h +400 /2h
- 155(F) 180(H)
- 
- 
- 
- 
- 
- 

- 315 90kW,6P IE3 380/660V
- IP55 300 /2h WXF3-315M-6 F300 90kW 380/660V 50Hz IMB3 IP55
-



卧龙电气驱动集团股份有限公司  
WOLONG ELECTRIC GROUP CO.,LTD.

Add: 1801  
Web: [www.wolong.com.cn](http://www.wolong.com.cn)